


CATALOG#: ASGN4X

UL LISTED

CANADIAN UL LISTED

*NOTE: THE MAXIMUM SPACING BETWEEN SCREWS IS 8.25".

10-24 SCREWS THREAD INTO SEALED WELLS TO PREVENT LIQUID, DUST, ETC... FROM ENTERING INTO THE BOX THROUGH THE SCREW HOLES

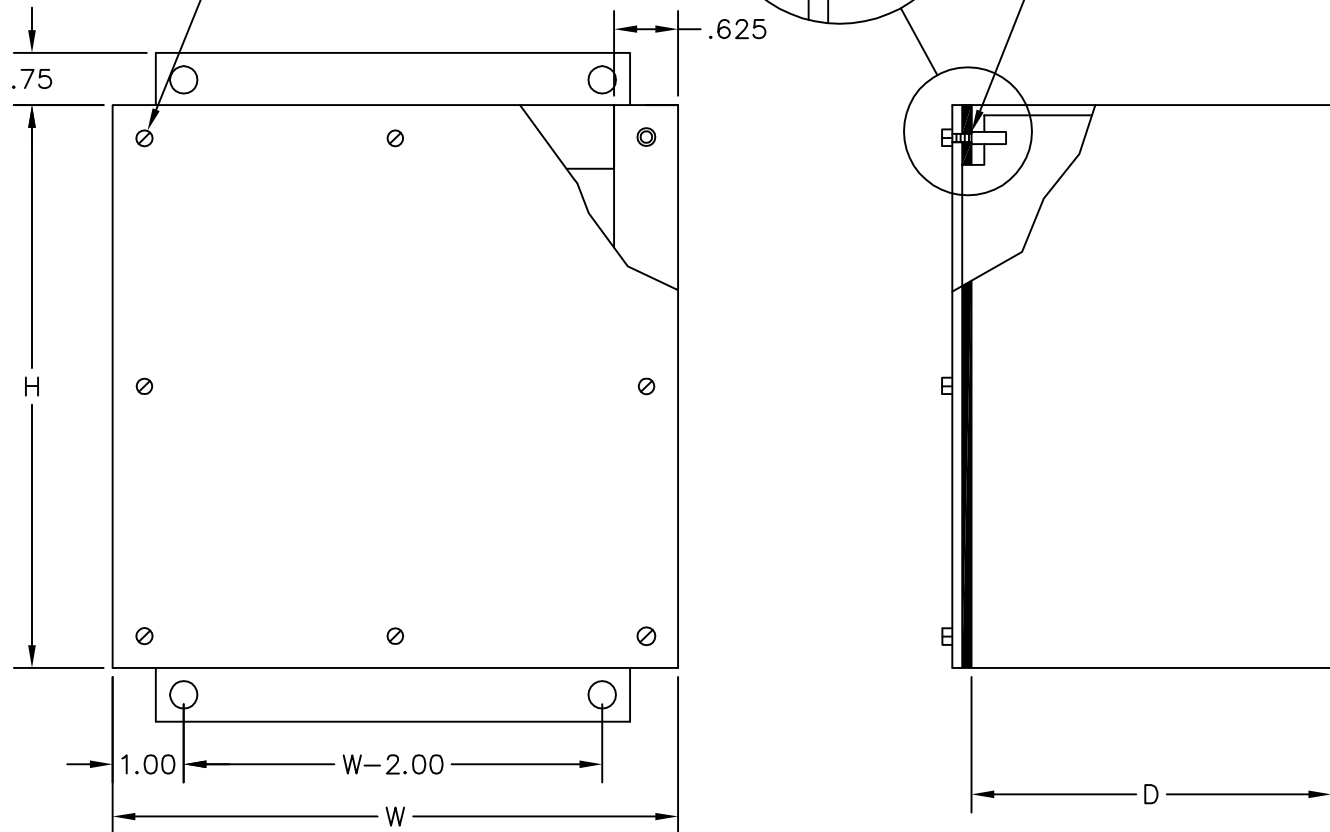

OIL-RESISTANT GASKET WITH SEALED WELLS

CONSTRUCTION:

- TYPE 5052 H-32 .080 ALUMINUM.
- SEAMS CONTINUOUSLY WELDED AND GROUND SMOOTH.
- REMOVABLE COVER FASTENED WITH PLATED STEEL SCREWS.

FINISH:

- NUMBER 3 SMOOTH BRUSH FINISH.

-H-	-W-	-D-

APPROVAL: _____

ALUMINUM TYPE 4X GASKETED SCREW COVER



E-BOX

101 Air Park Industrial Road
Alabaster, Alabama 35007
Phone: (205)663-9189
Fax: (205)663-9587

