


CATALOG#: SG

UL LISTED


CANADIAN UL LISTED

*NOTE: THE MAXIMUM SPACING BETWEEN SCREWS IS 12.25".

10-24 SCREWS THREAD INTO SEALED WELLS TO PREVENT LIQUID, DUST, ETC... FROM ENTERING INTO THE BOX THROUGH THE SCREW HOLES



OIL-RESISTANT GASKET WITH SEALED WELLS

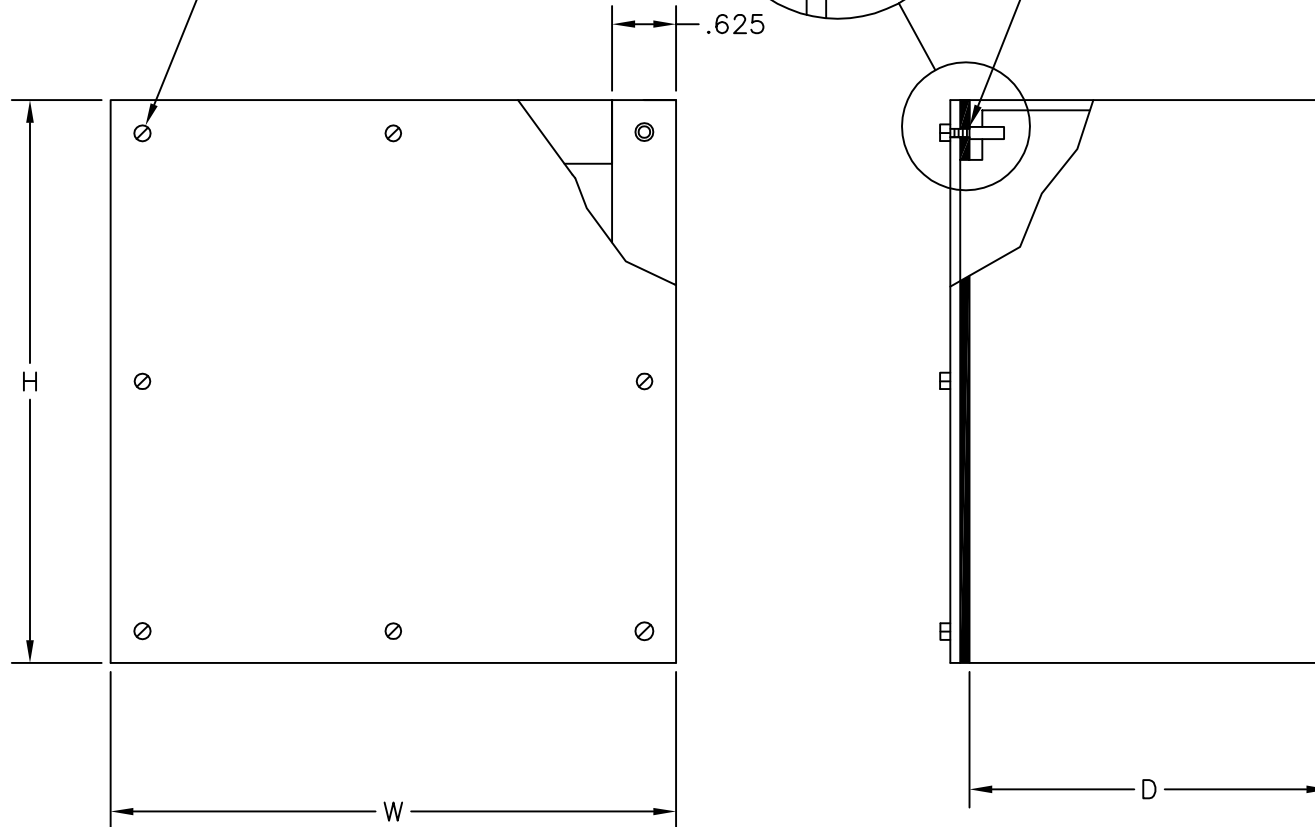

CONSTRUCTION:

- CODE GAUGE PAINT GRIP GALVANIZED STEEL.
- SEAMS CONTINUOUSLY WELDED AND GROUND SMOOTH.
- REMOVABLE COVER FASTENED WITH PLATED STEEL SCREWS.

FINISH:

- ANSI GRAY POLYESTER POWDER COATING INSIDE AND OUT.

-H-	-W-	-D-

APPROVAL: _____

TYPE 3 AND TYPE 12 GASKETED SCREW COVER



E-BOX
101 Air Park Industrial Road
Alabaster, Alabama 35007
Phone: (205)663-9189
Fax: (205)663-9587

