

CATALOG#: SSGN4X


UL LISTED

CANADIAN UL LISTED

*NOTE: THE MAXIMUM SPACING BETWEEN SCREWS IS 8.25".

1/4-20 SCREW

OIL RESISTANT GASKET

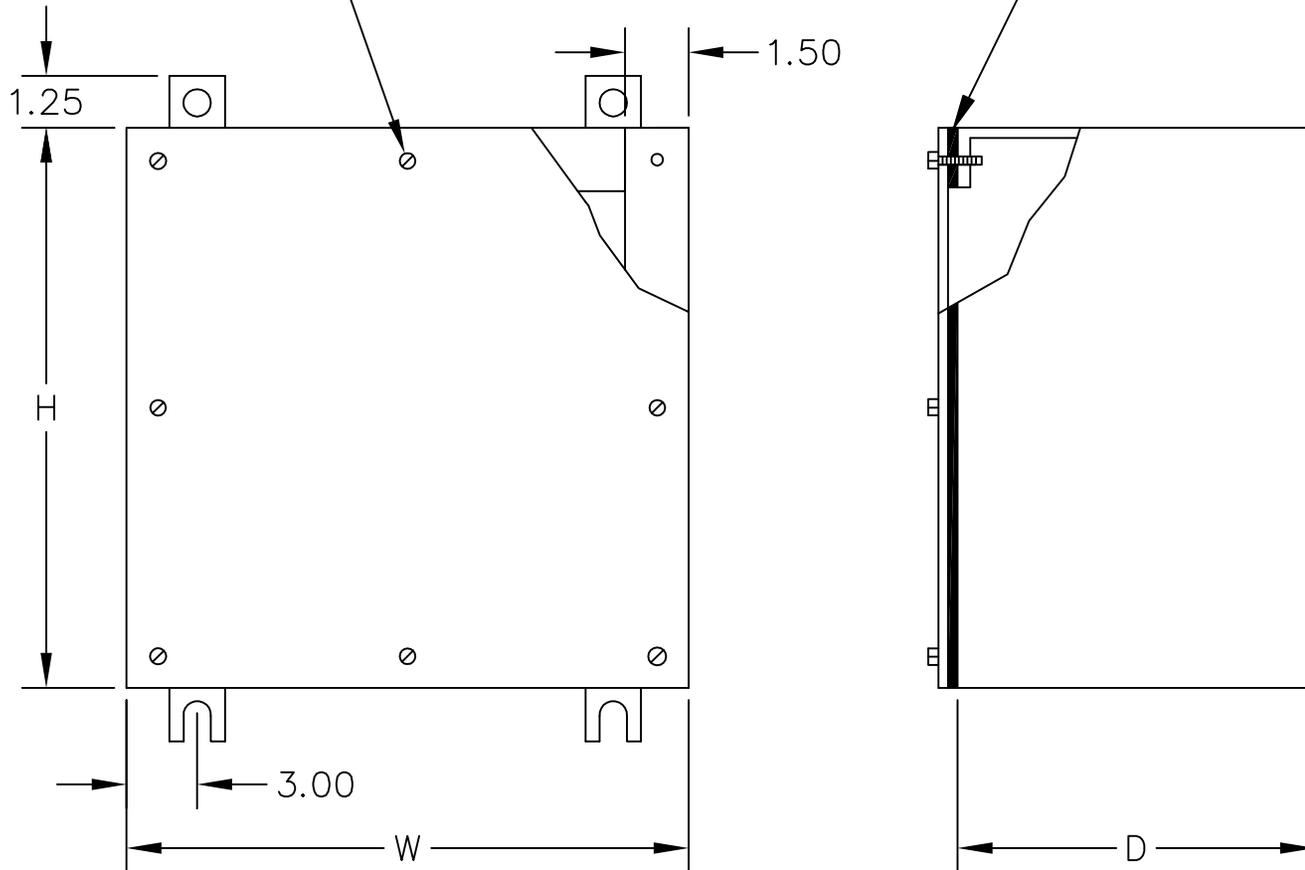

CONSTRUCTION:
 -12 GAUGE TYPE 304 STAINLESS STEEL.
 -SEAMS CONTINUOUSLY WELDED AND GROUND SMOOTH.
 -REMOVABLE COVER FASTENED WITH STAINLESS STEEL SCREWS.

FINISH:
 -ENCLOSURES ARE UN-PAINTED AND HAVE A SMOOTH BRUSHED FINISH.

-H-	-W-	-D-

APPROVAL:

STAINLESS STEEL TYPE 4X GASKETED SCREW COVER



E-BOX
 101 Air Park Industrial Road
 Alabaster, Alabama 35007
 Phone: (205)663-9189
 Fax: (205)663-9587

